



POTTERS 5x25 cm / 2"x10"



Swan

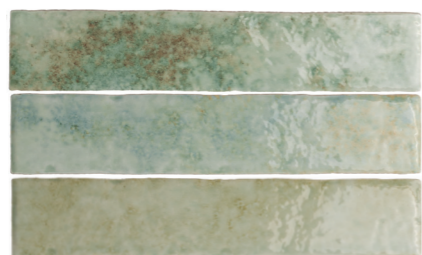

Agave

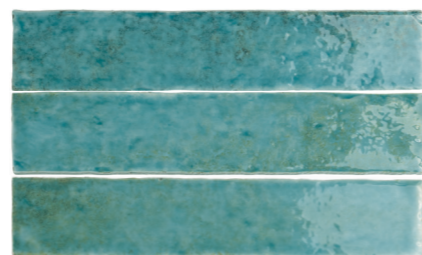

Azur



Fossil



Forest



Prusian



Umber



Wine

POTTERS BARS 12,5x25 cm / 5"x10"



Swan



Agave



Azur



Fossil



Forest



Prusian



Umber



Wine



Potters Wine 56,5%
Potters Bars Wine 43,5%

Floor: Tanka Graphite (Enzō Collection)





Potters Bars Forest




Potters Azur

Potters Azur
Potters Bars Azur

Floor: Contempo Strip Oak (Love Affairs Collection)



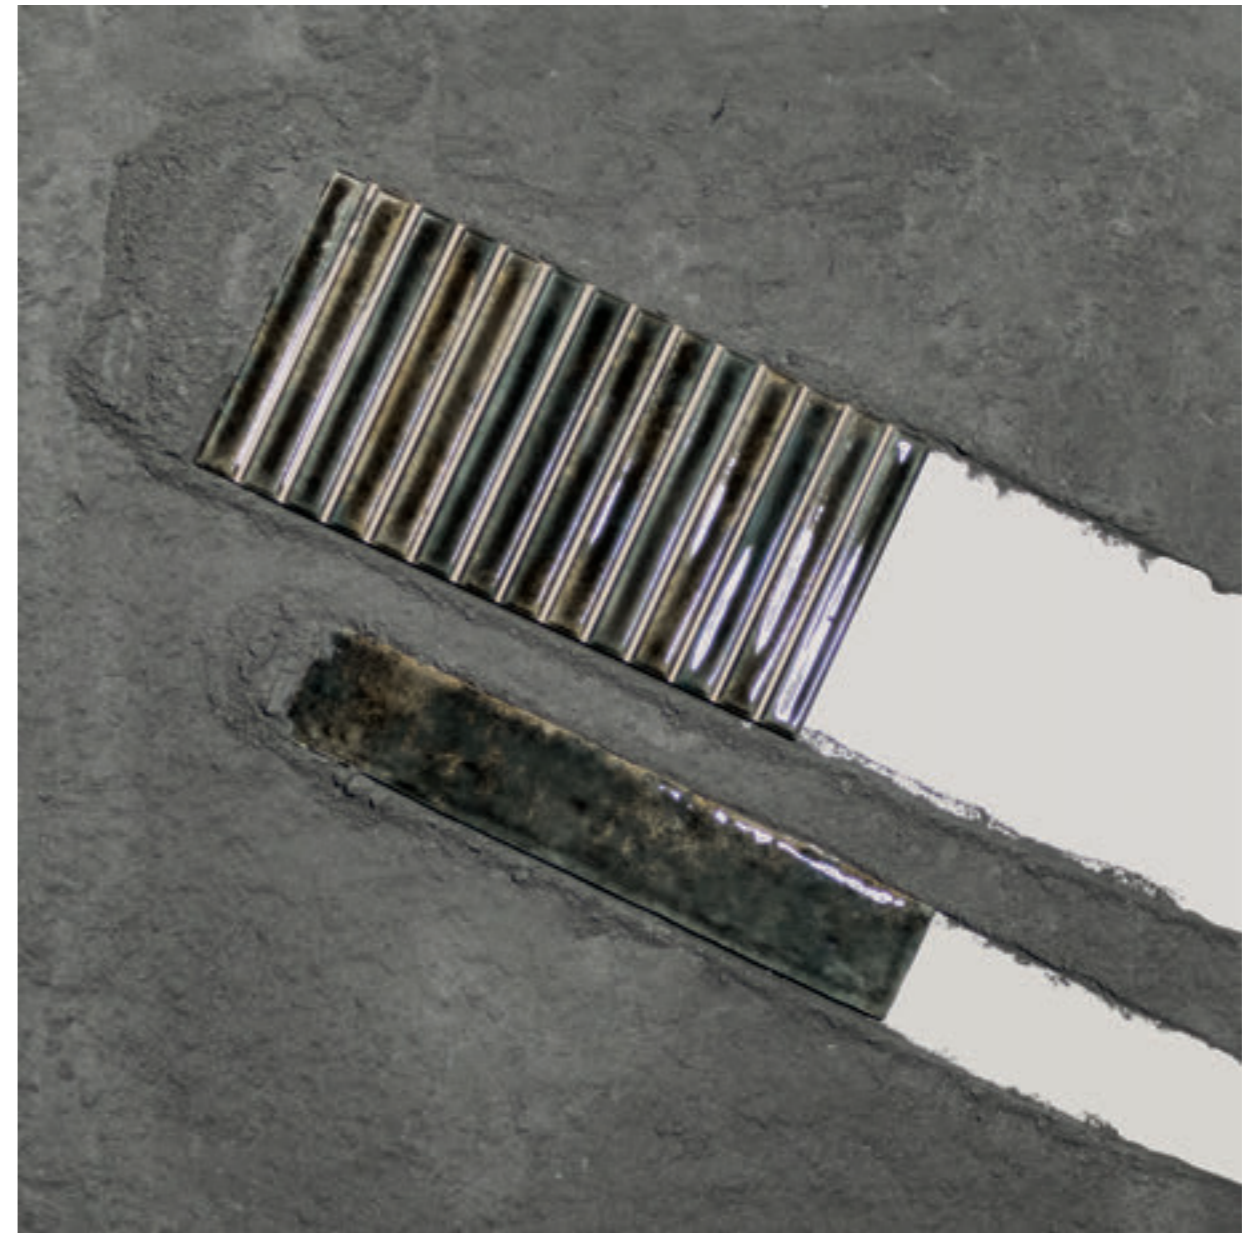

Potters Umber
Potters Bars Umber



Potters Forest

Floor: Roots XXL & L Sand (Roots Collection)




Potters Wine
Floor: Halo Midday XXL Sand Sparks







HOW TO CREATE ROUNDED CORNERS

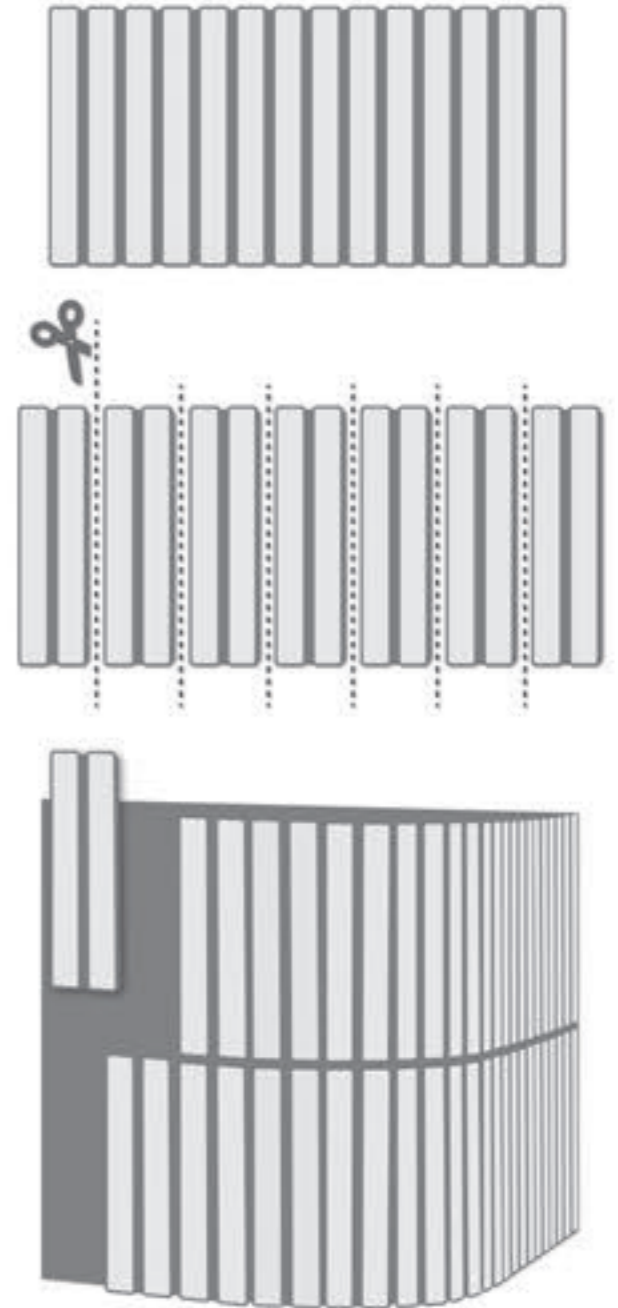


◀ Potters Swan
Potters Bars Swan

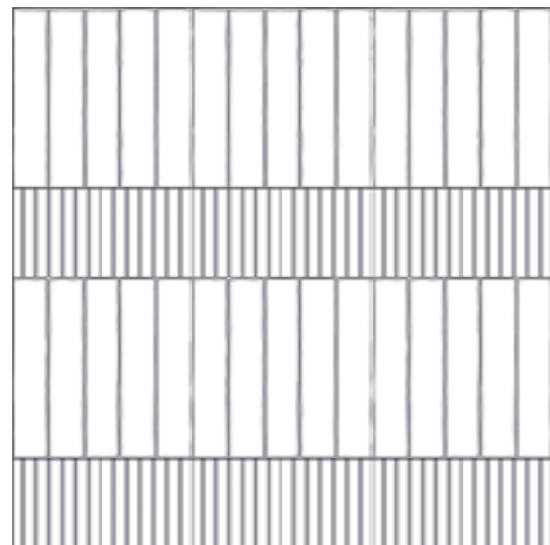


Potters - 62,5%
Potters Bars - 37,5%

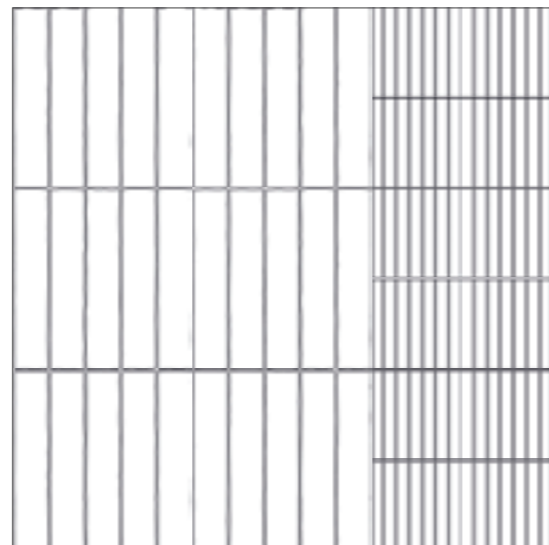


Potters
Potters Bars

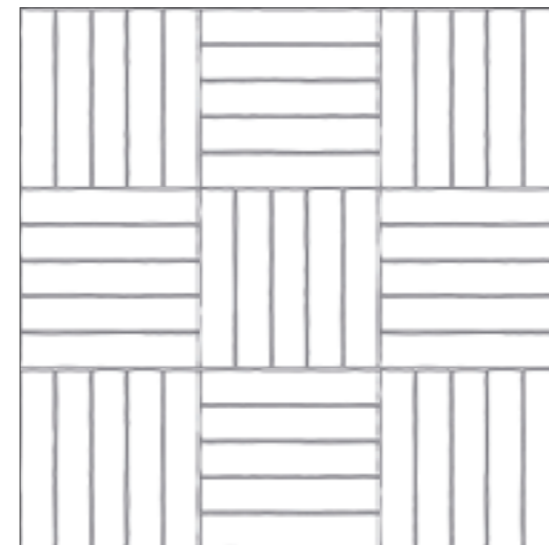


Potters

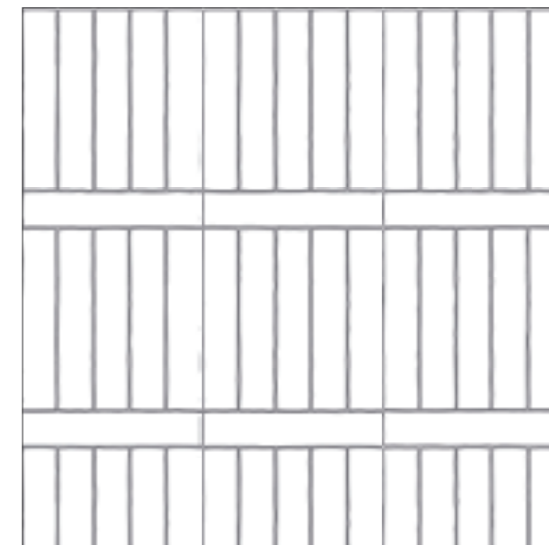


Potters

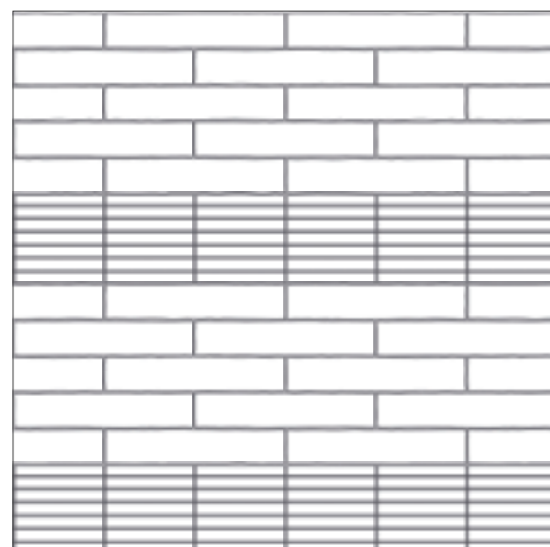


Potters - 56,5%
Potters Bars - 47,5%

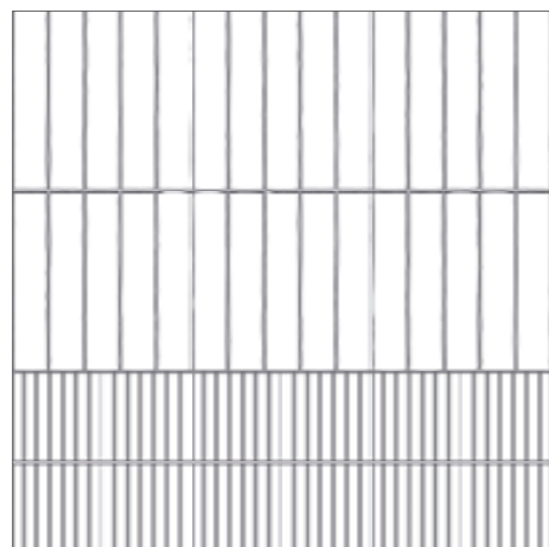

Potters
Potters Bars

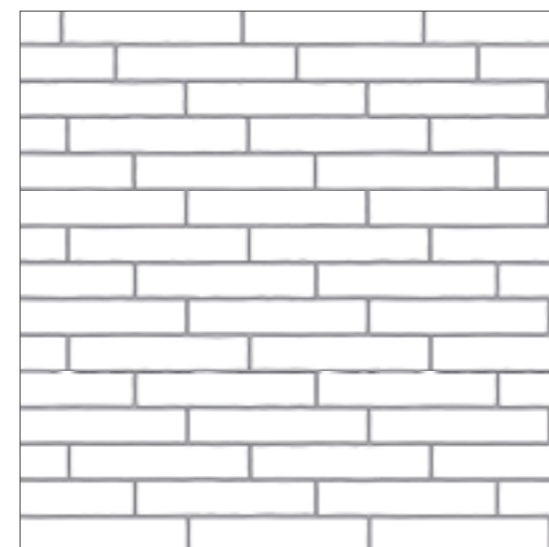



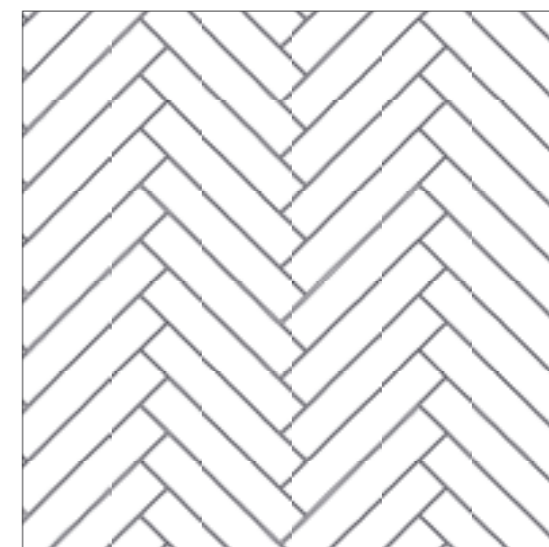






Potters



Potters







04. TECHNICAL FEATURES / INFORMACIÓN TÉCNICA

Technical features for Dry-Pressed ceramic tiles with water absorption BIII (Eb >10%)
 Características técnicas para las baldosas cerámicas prensadas en seco del grupo BIII (Eb >10%)

FEATURES / CARACTERÍSTICAS	SPECIFICATION / ESPECIFICACIÓN	NORMA
 Dimensional Features	<p>Potters 48,5 mm +/- 0,75 mm x 248,5 mm +/- 1,20 mm</p> <p>Potters Bars 124,0 mm +/- 0,75 mm x 249,0 mm +/- 1,20 mm</p>	UNE-EN ISO 10545-2:2019
 Water absorption	$E_b > 10\%$	UNE-EN ISO 10545-3:2018
 Modulus of rupture and breaking strength	$\geq 12 \text{ N/mm}^2$ $\geq 600 \text{ N}$	UNE-EN ISO 10545-4:2019
 Crazing resistance	Pass	UNE-EN ISO 10545-11:1997
 Household products resistance	GA	UNE-EN ISO 10545-13:2017
 Chemical resistance	GHA	UNE-EN ISO 10545-13:2017
 Stain resistance	Class 5	UNE-EN ISO 10545-14:2017
 Tone variation	V4	-
 White body	-	-

05. PACKING



			KG 	M2 		M2 
Modelo	Formato (cm)	Piezas / Caja	Kg / Caja	m2 / Caja	Cajas / Palet	m2 / Palet
POTTERS	5x25 cm	60	9,79 kg	0,75 m ²	96	72 m ²
POTTERS BARS	12,5x25 cm	14	7,30 kg	0,438 m ²	138	60,444 m ²

			LB 	FT2 		FT2 
Model	Format (in)	Piezas / Box	Lb/ box	sq ft / Box	Boxes / Pallet	sq ft / Pallet
POTTERS	2"x10"	60	21.583 lb	8.072 ft ²	96	774.912 ft ²
POTTERS BARS	5"x10"	14	16.093 lb	4.714 ft ²	138	650.532 ft ²

06. PRICE CODE

MODEL / MODELO	PRICE CODE / CODIGO TARIFA
POTTERS	W12
POTTERS BARS	W32

07. TECHNICAL DRAWINGS / DIBUJOS TÉCNICOS

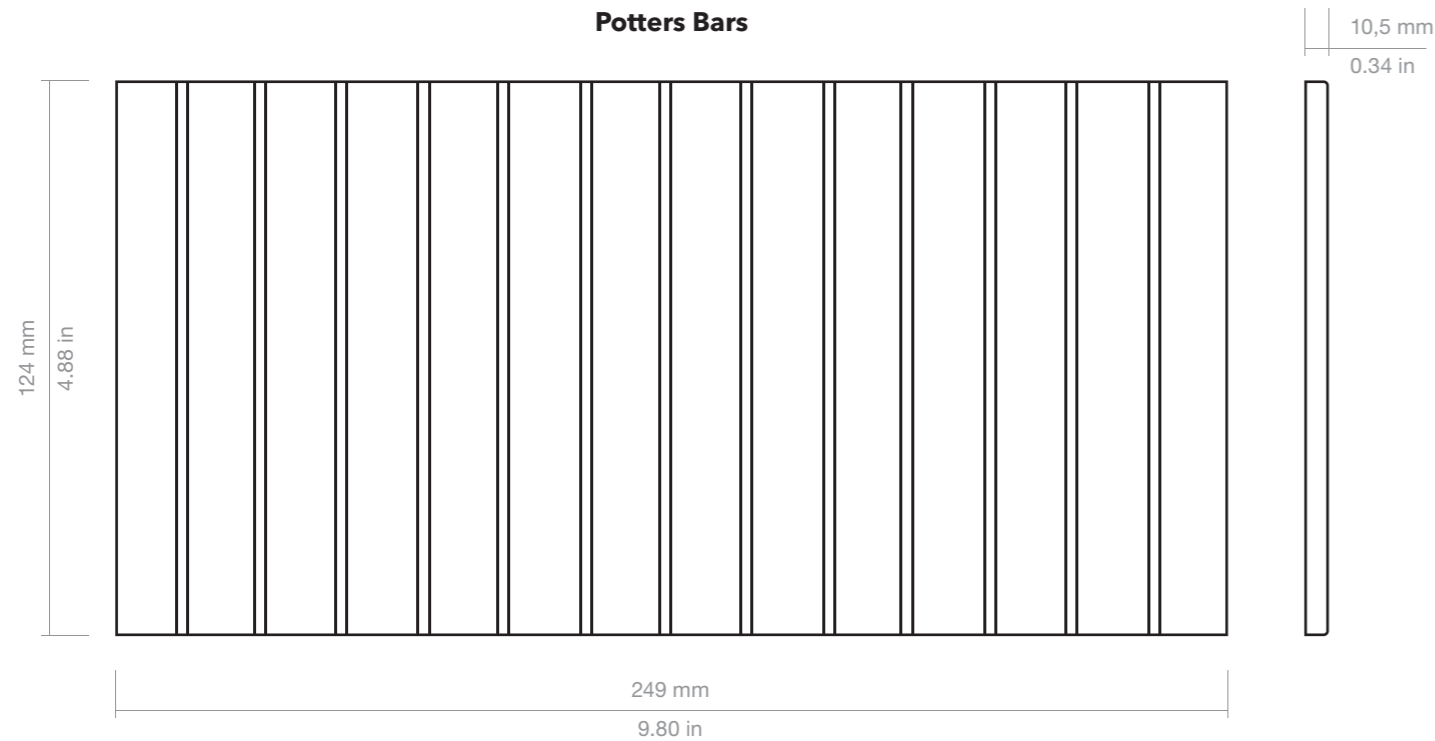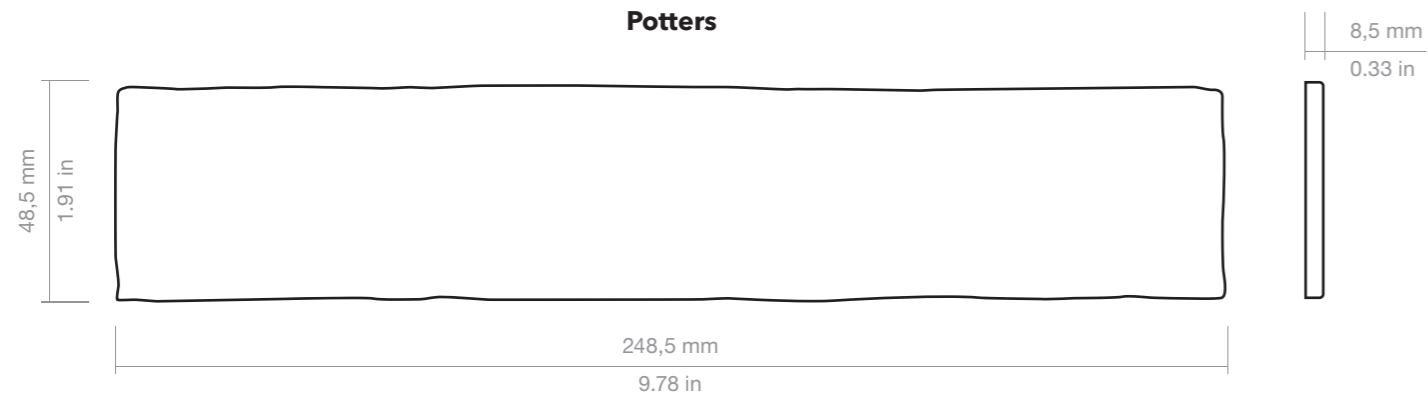

08. RECOMMENDATIONS / RECOMENDACIONES

BEFORE INSTALLING THE PRODUCT

The surface where the product is being installed must be clean and level.
It is recommended that the layout of the product is prepared before the final installation.
Make sure you choose an adhesive apt for the area where the product is being installed.
For installation on porous surfaces we recommend: Kerakoll Special® Eco, and for Non-porous surfaces: Kerakoll serie H40® Eco.

The choice of quality grouting mortar is crucial.
We recommend Kerakoll Fugabella® Color.
(www.kerakoll.com)

TO ENHANCE YOUR WOW PRODUCT

In order to obtain the maximum WOW effect, use 1,5 mm - 0.06 in spacers between the tiles to maintain an even installation over the whole surface.
The colour of the grout should be as close as possible to the colour of your product.
Once the area has been grouted, and before the grout dries, remove any excess material with a damp sponge.

MAINTENANCE

Maintenance free. Easy and practical to care for, due to the high standard of technical characteristics in each WOW ceramic product.
Avoid abrasive or acidic cleaning products.
It is recommended to clean with clear water.

ANTES DE LA COLOCACIÓN

Preparar la superficie sobre la que se va a colocar tu producto WOW. Debe estar limpia y aplomada.
Se recomienda plantear la colocación, previo a su instalación.
Elegir el material de agarre en función de las características de la superficie.
Se recomienda para colocación general en superficies porosas: Kerakoll special® Eco. y para superficies no porosas como el pladur: Kerakoll serie H40® Eco.

Es importante la elección de un material de rejunte de calidad. WOW recomienda utilizar el material de rejunte Kerakoll fugabella® Color (www.kerakoll.com), cuyas características son especialmente adecuadas para este revestimiento.

PARA ENSALZAR EL ASPECTO DE TU PRODUCTO WOW

Se recomiendan separadores de 1,5 mm para colocar las piezas y conseguir de esta forma un aspecto WOW óptimo.
También es aconsejable que el color de rejuntado sea similar al color del producto elegido.
Una vez rejuntado el producto, y antes de que se endurezca, retirar el material sobrante de rejuntado con una esponja mojada en agua.

MANTENIMIENTO

Práctico y sencillo de limpiar, dadas las excelentes características técnicas del producto WOW, tan sólo es necesario un cuidado rutinario, evitando la utilización de productos abrasivos o ácidos.
Se recomienda limpiar exclusivamente con agua limpia.